
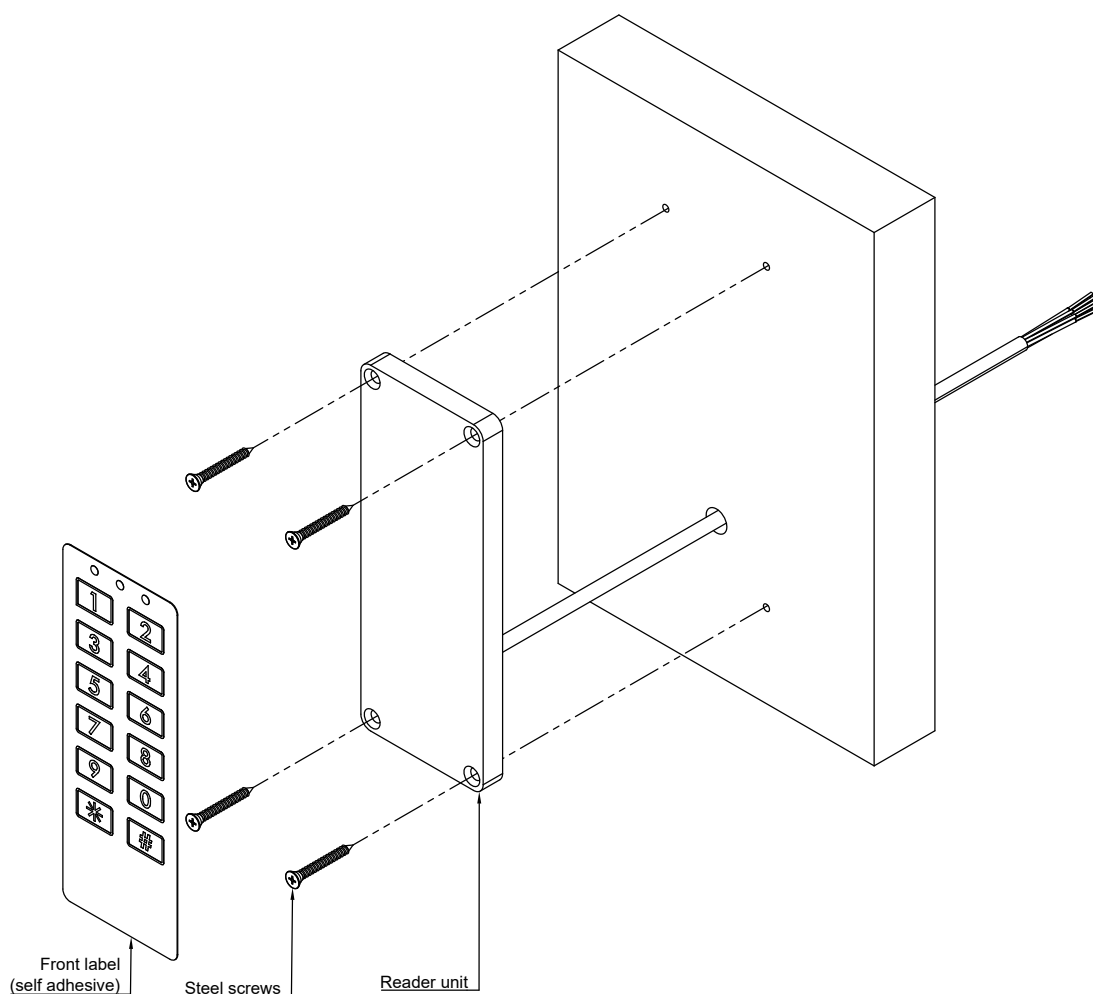
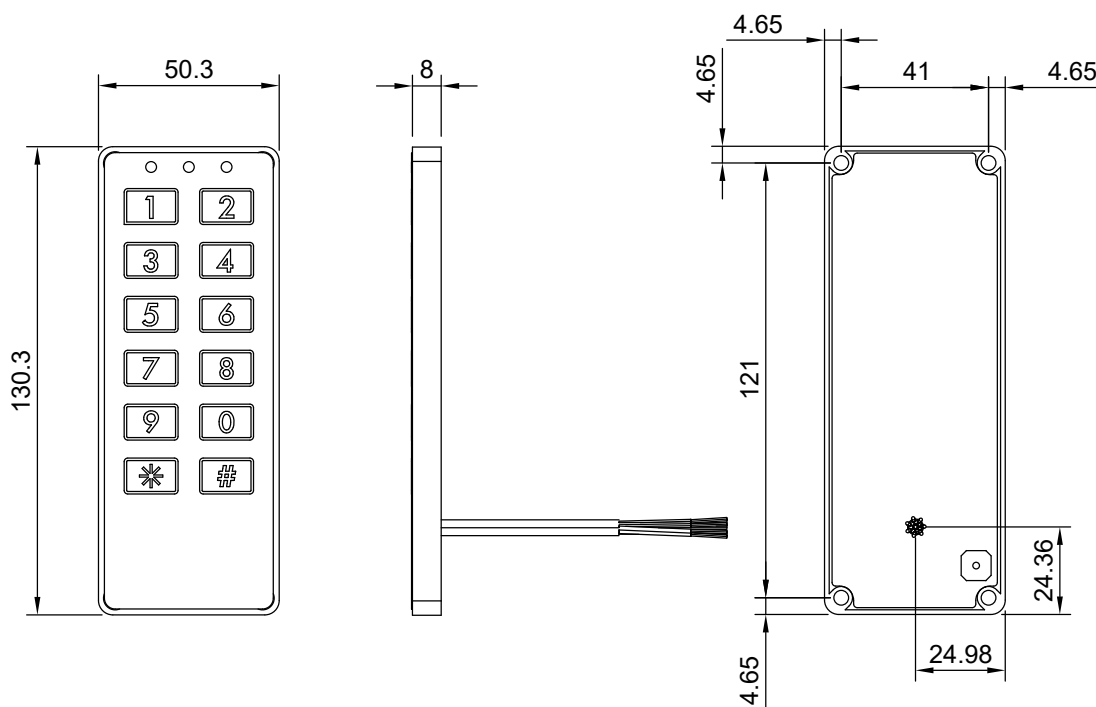


- Eng **Installation guide**
 DK *Installationsvejledning*
 D *Montageanleitung*




(Eng) Installation


(Dk) Installation

(D) Montageanleitung


1

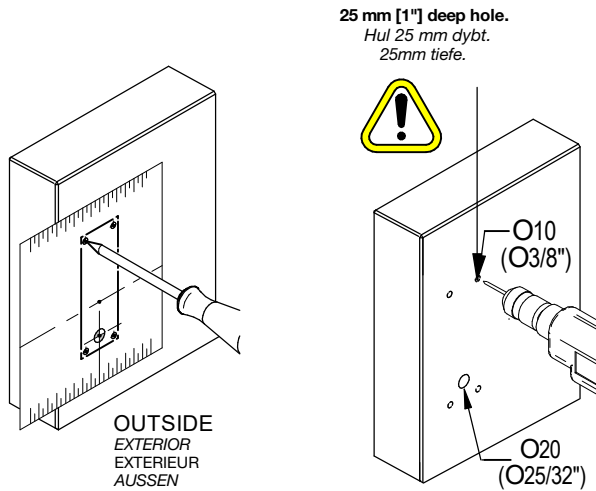


2

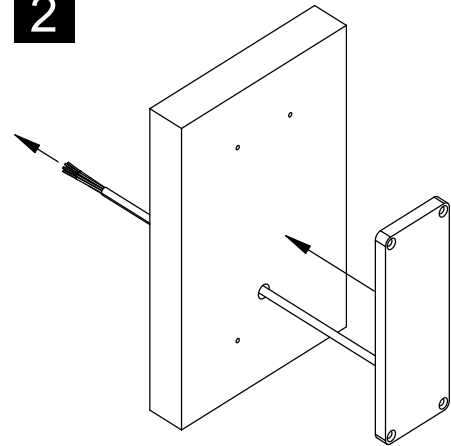

3

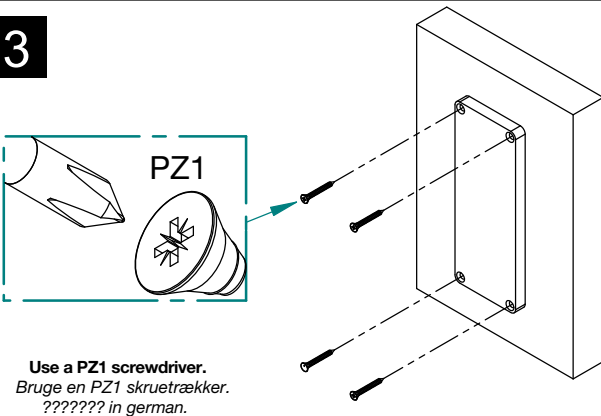

4

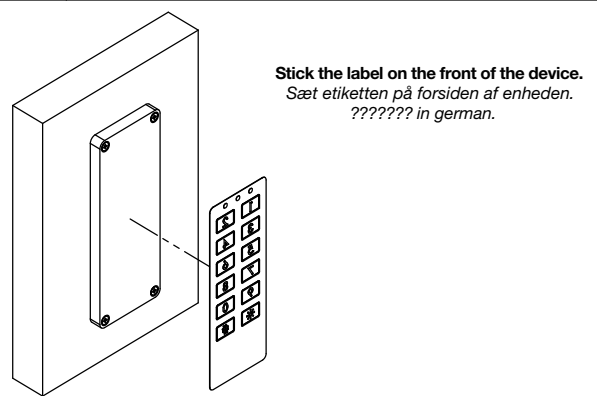


(Eng) Wiring

(Dk) Kabelforbindelser

(D) Kabelverbindungen

Cable color	Function
Red	Power +, 9 to 24 VDC, ~45mA
Black	Power -, GND
White	Output 1, Open Collector, active LOW (GND)
Yellow	Output 2, Open Collector, active LOW (GND)
Green	Input, exGreen, activates/disactivates Green LED, active LOW (GND)
Orange	Input, exRed, activates/disactivates red LED, active LOW (GND)
Brown	Input, exBuzzer activates/disactivates Buzzer, active LOW (GND)
Blue	Input, REX, Request of Exit, active LOW (GND)

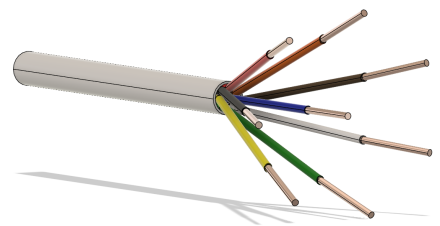

Eng Electrical characteristics

Dk Elektriske detaljer

D Elektrische Eigenschaften

Eng

OPERATING CHARACTERISTICS			
	Min.	Max.	Unit
Temperature	-35	66	°C
Humidity	0	95	%

POWER SUPPLY	
9 to 24	VDC

E

MILJØBETINGELSER			
	Min.	Max.	Måleenhed
Temperatur	-35	66	°C
Fugtighed	0	95	%

STRØMFORSYNING	
9 to 24	VDC

D


OMGEVING			
	Min.	Max.	Einheit
Temperatur	-35	66	°C
Luftfeuchtigkeit	0	95	%

ENERGIEVERSORGUNG	
9 to 24	VDC

Eng Lock connection

Dk Låseforbindelse

D Verriegelungsverbindung

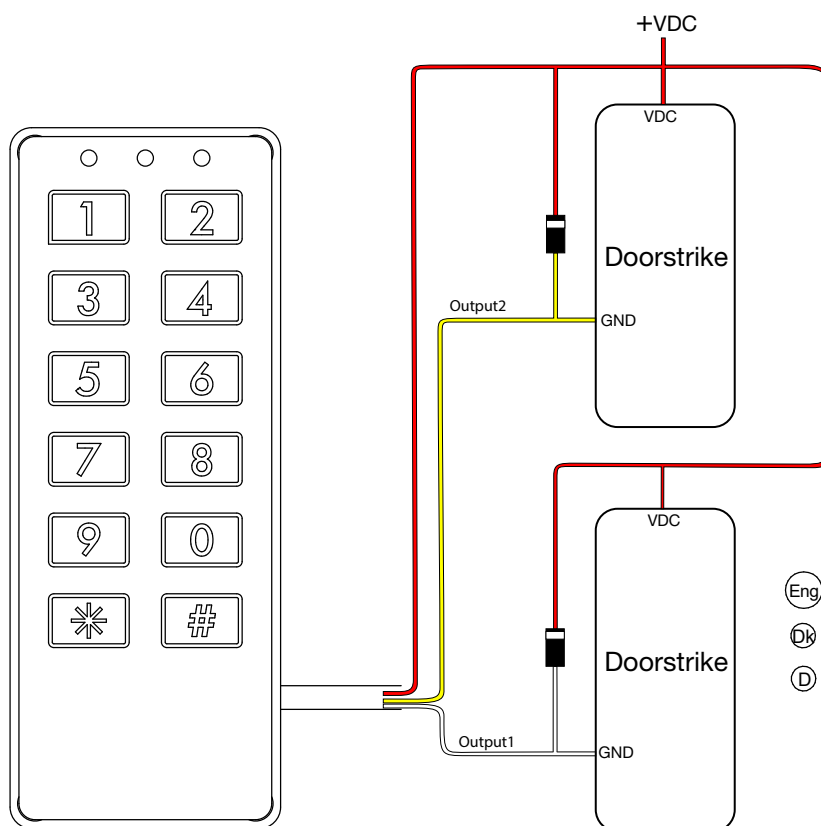

Eng Optionally connect Output1.

Dk Eventuelt tilslut Output1.

D Optional Output1 anschließen.